

# 06

## Lockable Tie down product instructions



1. Place board / boards on roof racks. Pass loose end of strap under bar on far side of board. Position buckle on top of board.



2. Pass loose end of strap under bar on nearest side of board.



3. Thread loose end of strap through from underside of buckle.




4. Push down clasp lever and tension strap.



5. Pull loose end and tighten.



6. Ensure boards are tightly secured. If not, push down clasp and tighten again.

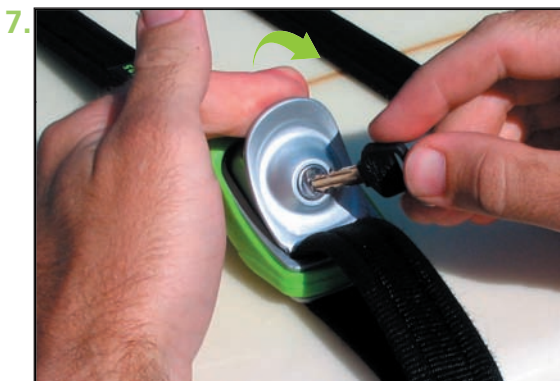

7. Once fully tensioned - lift clasp lever and let go of the loose end of the strap.



8. Pull up clasp lever to ensure it is fully lifted, and turn key. (If the key does not turn easily the clasp lever is not fully lifted, and more tension may need to be applied to the strap.) The key never requires any forcing



9. Tie off loose end. Repeat steps for 2nd strap. Always inspect load before and during travel to ensure the load and roof racks are secure.

### Please Note:

The lockable tie downs have been designed to be used under tension. It will be difficult to lock the buckle when you are not actually tying anything down.

### Caution:

Never overload roof racks. Always inspect Tiedowns for possible damage and wear before starting vehicle or leaving it unattended. SPT makes no representation regarding the suitability of the Tiedowns for your purposes. The manufacturer and sellers assume no responsibility or liability of any nature for injury or loss caused by this product to any person or persons or property of buyer, user, or other persons.